


# DASH4PRO Technical Specifications

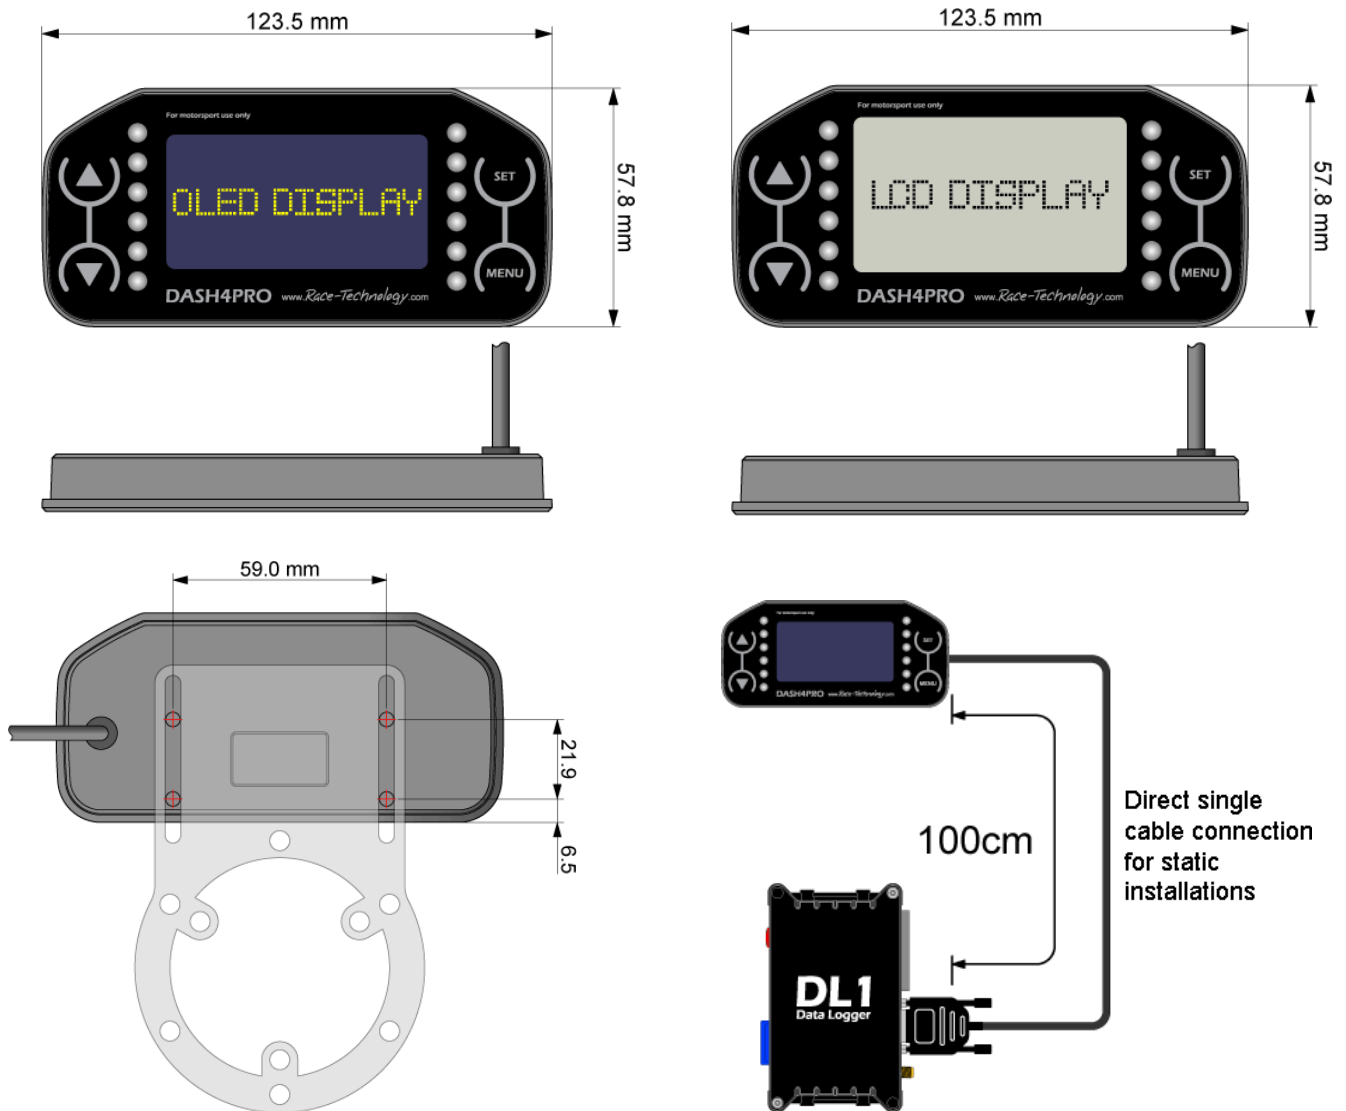

isplay	Yellow OLED/white backlit LCD, resolution 128 x 64 pixels.
Case	Die-cast aluminium, black powder coated finish 124mm x 58mm x 14mm
Connections	Single 9-way d-type, for serial communications and power for direct connection to a DL1 data logger and optional direct CAN
Power supply	Requires 12v at approximately 100mA
Processor	32bit DSP running at 150MHz. Internal Flash for program and configuration storage.
Temperature range	Operation between 0oC to 50oC, Storage from -20oC to 80oC.
LEDs	2 rows of 6 very high brightness 5mm LEDs. 20 degree viewing angle. 10 steps of brightness control.
Membrane keypad	Polyester textured membrane to limit reflections. 12mm diameter buttons.
Unit fixing	4 x blind threaded holes for M4 screws, maximum depth 6mm.