

ORIENTATE RETAINER SO THAT
THE RECESSED POCKET FOR
OIL SUPPLY IS LOCATED ON TOP

TWO HOLE LOCATIONS FOR
SHOULDER BOLT / ANTI ROTATION
ALLOWS FOR FINE ADJUSTMENT
OF OVERALL HEIGHT

AN-4 HYDRAULIC LINES, 15" LONG, FEMALE SWIVEL ENDS
(SHOWN TRUNCATED)

CUSTOM DUAL O-RING FITTING
WITH SNAP RING
ALLOWS 360° ROTATION FOR ROUTING

ANTI-ROTATION BOLT
P/N: 1/4 X 1 SB
(1.00" LONG)


Ø 4.682
[118.92]

RETAIN AND REUSE ORIGINAL
MOUNTING BOLTS. TREMEC
SPECIFIES INSTALLATION
TORQUE OF 12-16 FT-LBS.

HOSE (QTY 2)
P/N: 62-521

SNAP RING (QTY 2)
P/N: 5100-43

BLEED ASSEMBLY (QTY 2)
P/N: 62-522

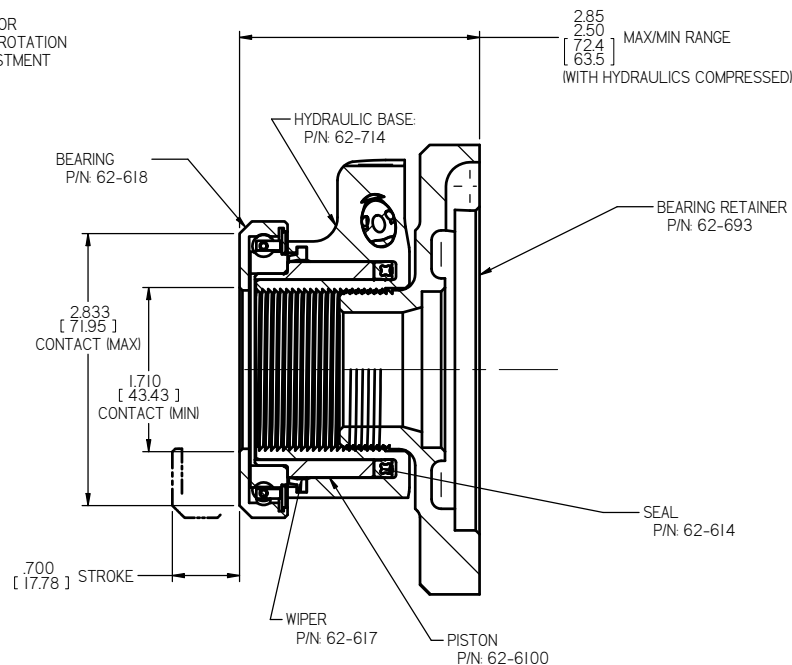


NOTES:

1. DIMENSIONS AND TOLERANCES PER ASME Y14.5 - 2009
2. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES [mm].
3. USE ONLY WITH DOT-3 OR DOT-4 BRAKE FLUID.
4. NO INTERNAL TRAVEL LIMITER. MUST BE USED WITH CLUTCH PEDAL STOP.
5. SEAL REBUILD KIT = 62-905.
6. SEAL INSTALLATION TOOL = 96-002.
7. HYDRAULIC AREA = 1.215 SQ IN.
8. EITHER PORT MAY BE USED FOR FEED OR BLEED. RECOMMEND USING UPPER PORT AS BLEED PORT.

NOTICE: INPUT SHAFT ENDPLAY SHOULD BE CHECKED UPON INSTALLATION OF THIS BEARING RETAINER. TREMEC RECOMMENDS BETWEEN .001" AND .005" ENDPLAY. TYPICALLY THE ORIGINAL SHIMS WILL BE REUSED. UNDER RARE CIRCUMSTANCES, SHIMS MAY NEED TO BE CHANGED TO ACHIEVE CORRECT ENDPLAY.

TILTON ENGINEERING, INC.

25 EASY STREET, P.O. BOX 1787, BUELLTON, CA 93427
PHONE: 805/688-2353 FAX: 805/688-2745 WWW.TILTONRACING.COM



**TITLE: HYDRAULIC RELEASE BEARING ASSEMBLY
FLAT FACE, ADJUSTABLE BASE, FOR SBC/BBC TO TKO/TKX**

DRAWN BY WAHL	CHKD	SCALE 1:1	SIZE C	DWG 6323	REV NC
P/N 60-6106	DATE 3/4/2022	SHEET 1 OF 1			

tiltonENGINEERING INC.

"This document contains proprietary information of TILTON ENGINEERING, INC. and its receipt or possession does not convey the right to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure, or use without specific written authorization of TILTON ENGINEERING, INC. is strictly forbidden."